


产品信息

- 材料：聚酯型聚氨酯
- 硬度：95A-98A
- 流体：空气
- 环境及流体温度：-20℃~+80℃
- 特点：具有良好额耐压，耐气候，耐腐蚀，耐曲折性能，用于气动管路的连接。

CHARATERISTICS

- Material ;Ester-Base Polyurethane
- Durometer; 95A or 98 A
- Fluid: Air
- Operating Temperature: -20℃~+80℃
- Features:Excellent performance of resistance against high pressure, vibration, weather,corrosion and bending,flexible for connecting air piping system.

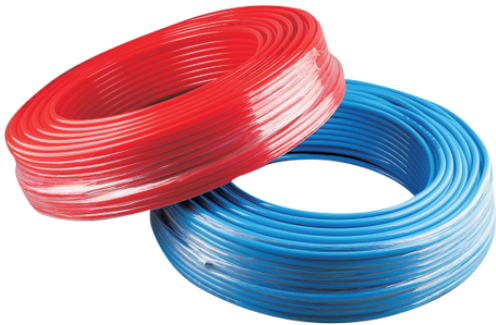

订购码 / ORDER CODE

PU

系列 Series Code
PU: PU Tube
PA: Nylon Tube
PE: PE Tube

-

8

外经 O.D.
4: 4.0mm
6: 6.0mm
8: 8.0mm
10: 10mm
12: 12mm
14: 14mm
16: 16mm

X

5

内径 I.D.
2.5: 2.5mm
4: 4.0mm
5.5: 5.5mm
5: 5.0mm
6.5: 6.5mm
8: 8.0mm
10: 10mm
12: 12mm

-

100M

长度 Length
100M
200M

-

BU

颜色 Color
BU:Blue 蓝色
C:Transparent 透明
O:Orange 橙色
B:Black 黑色
G:Green 绿色
Y:Yellow 黄色
R:Red 红色

BU

Blue

C

Transparent

O

Orange

B

Black

G

Green

Y

Yellow

R

Red

产品规格 / SPECIFICATIONS

代码 Code	外经(mm) O.D.(mm)	内径(mm) I.D.(mm)	长度(M) Length(M/roll)	爆破压力(20℃,Bar) Bursting pressure at 20℃(Bar)	最小弯曲半径(mm) Min. bending radius at 20℃(mm)
PU4X2.5	4	2.5	200	30	10
PU6X4	6	4	200	30	15
PU8X5.5	8	5.5	100	24	20
PU8X5	8	5	100	30	20
PU10X6.5	10	6.5	100	30	30
PU12X8	12	8	100	30	35
PU14X10	14	10	100	24	55
PU16X12	16	12	100	24	65
PU5/32	3.94	2.5	200	30	10
PU1/4	6.35	4.23	200	30	15
PU5/16	7.94	5	100	30	20
PU3/8	9.52	6.35	100	30	30
PU1/2	12.7	8.46	100	30	35

产品信息

- 材料：聚酯型聚氨酯
- 硬度：95A-98A
- 流体：空气
- 环境及流体温度：-20℃~+80℃
- 特点：具有普通PU管的特性，还具有轻便、柔韧、耐久、伸缩自如、使用简单。

CHARATERISTICS

- Material ;Ester-Base Polyurethane
- Durometer; 95A or 98 A
- Fluid: Air
- Operating Temperature: -20℃~+80℃
- Features:Light, flexible and durable.Free extension and easy use.



订购码 / ORDER CODE

PUC

系列 Series Code
PUC: PU Coil Tube

-

8

外经 O.D.
4: 4.0mm
6: 6.0mm
8: 8.0mm
10: 10mm
12: 12mm

X

5

内径 I.D.
2.5: 2.5mm
4: 4.0mm
5.5: 5.5mm
5: 5.0mm
6.5: 6.5mm
8: 8.0mm

-

10M

长度 Length
1M
2M
...
25M

-

BU

颜色 Color
BU:Blue 蓝色
C:Transparent 透明
O:Orange 橙色
B:Black 黑色
G:Green 绿色
Y:Yellow 黄色
R:Red 红色

-

快插接头 Quick Couplers
Blank: Without couplers
QC: With female-male couplers

BU

Blue

C

Transparent

O

Orange

B

Black

G


Green

Y

Yellow

R

Red

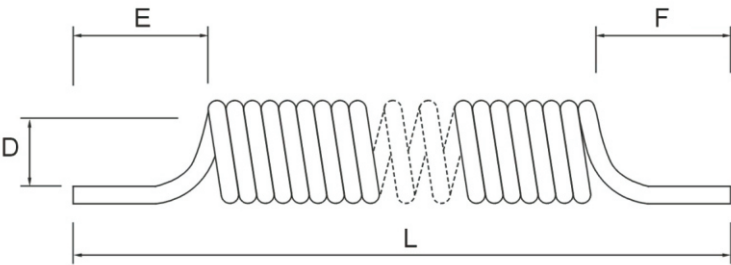

产品规格 / SPECIFICATIONS

代码 Code	D(mm)	最大长度 Maximum Length (L)	E(mm)	F(mm)
PUC4X2.5	25	20M	80mm	80mm
PUC6X4	32	25M	80mm	80mm
PUC8X5.5	40	20M	80mm	80mm
PUC8X5	40	20M	80mm	80mm
PUC10X6.5	48	20M	80mm	80mm
PUC12X8	58	20M	80mm	80mm
PUC1/4	32	20M	80mm	80mm
PUC3/8	48	20M	80mm	80mm
PUC1/2	58	20M	80mm	80mm