

特点

- 除密封圈外所有零件都采用SUS316L材料制成，具有很强的抗腐蚀能力。
- 密封圈采用氟橡胶(FKM)，具有很强的抗化学腐蚀性能力，并且耐酸、耐高温。
- 所有零件均属于无油规格并符合食品卫生法，广泛用于食品/化学/包装/医疗等行业。


FEATURES

- The body is made from SUS316L with high resistance to corrosion
- FKM O-ring offer excellent resistance to corrosion, acid and high temperature.
- All spare parts are oil-free and comply with the Food Hygiene Law, widely used in food, chemical, packaging, medical, etc.

技术参数 / SPECIFICATIONS

使用流体 / Fluid	空气、水、蒸汽 / Air、Water、Steam
使用压力范围 / Operating Pressure	0~1.5 MPa
保证耐压 / Max Pressure	1.8Mpa
负压 / Negative Pressure	-100Kpa (10Torr)
使用温度范围 / Operating Temperature	-20~220℃

结构图 / STRUCTURE CHART

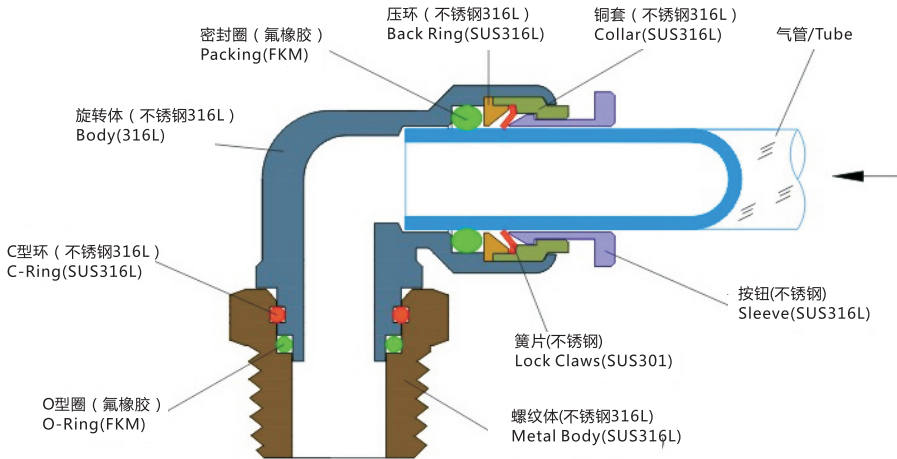

订购码 / ORDER CODE

S	PC	8	-	01	-	*
(1)	(2)	(3)		(4)		(5)

- (1) 系列号 / Series Code
(2) 型号 / Model
(3) 气管直径 / Tube O.D.

公制尺寸 / Metric Size						
代号 / Code	4	6	8	10	12	14 16
气管外径 / Tube Outer Diameter (mm)	Φ4	Φ6	Φ8	Φ10	Φ12	Φ14 Φ16


英制尺寸 / Inch Size						
代号 / Code	5/32	3/16	1/4	5/16	3/8	1/2
气管外径 / Tube Outer Diameter (mm)	Φ5/32	Φ3/16	Φ1/4	Φ5/16	Φ3/8	Φ1/2

- (4) 螺纹大小 Thread Size
(5) 螺纹标准 / Thread Type: 空白代表PT螺纹, G代表G螺纹, N代表NPT螺纹
Blank : BSPT Thread, G: G Thread, N: NPT Thread


	55°直管螺纹 / 55° Taper Pipe Size					公制螺纹 / Metric Size			55°直管螺纹 / 55° Taper Pipe Size				
代号/ Code	01	02	03	04	06	M3	M5	M6	01G	02G	03G	04G	06G
螺纹 / Thread	R1/8	R1/4	R3/8	R1/2	R3/4	M3*0.5	M5*0.8	M6*1.0	G1/8	G1/4	G3/8	G1/2	G3/4

	统一细牙螺纹/UNF		美制60°直管螺纹 / American Standard Taper Pipe Thread (NPT)			
代号/ Code	U10		01N	02N	03N	04N 06N
螺纹 / Thread	10-32UNF		NPT1/8	NPT1/4	NPT3/8	NPT1/2 NPT3/4


S-PC

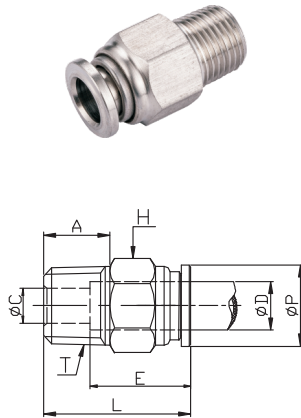

S-PC-G

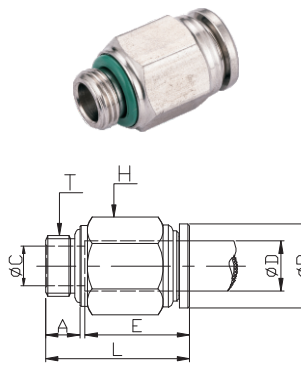

S-PC-N

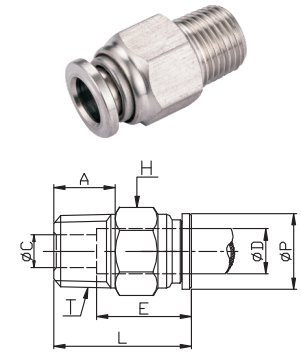

型号/MODEL	T	ΦD	ΦP	L	A	ΦC	E	H
S-PC04-M5	M5	Φ4	Φ9.5	21.5	5	Φ2.5	13.5	S10
S-PC04-M6	M6	Φ4	Φ9.5	21.5	5	Φ2.5	13.5	S10
S-PC04-01	R1/8	Φ4	Φ9.5	19	8	Φ3.2	13.5	S10
S-PC04-02	R1/4	Φ4	Φ9.5	20.5	11	Φ3.2	13.5	S14
S-PC04-03	R3/8	Φ4	Φ9.5	21.5	11	Φ3.2	13.5	S17
S-PC06-M5	M5	Φ6	Φ11	21.5	5	Φ2.5	15.5	S12
S-PC06-M6	M6	Φ6	Φ11	21.5	5	Φ2.5	15.5	S12
S-PC06-01	R1/8	Φ6	Φ11	22	8	Φ5.2	15.5	S12
S-PC06-02	R1/4	Φ6	Φ11	23	11	Φ5.2	15.5	S14
S-PC06-03	R3/8	Φ6	Φ11	23	11	Φ5.2	15.5	S17
S-PC06-04	R1/2	Φ6	Φ11	26.5	14	Φ5.2	15.5	S22
S-PC06-06	R3/4	Φ6	Φ11	27.5	15	Φ5.2	15.5	S27
S-PC08-M5	M5	Φ8	Φ13.5	23.5	5	Φ2.5	16.5	S14
S-PC08-01	R1/8	Φ8	Φ13.5	25.5	8	Φ6	16.5	S14
S-PC08-02	R1/4	Φ8	Φ13.5	24.5	11	Φ7	16.5	S14
S-PC08-03	R3/8	Φ8	Φ13.5	23.5	11	Φ7	16.5	S17
S-PC08-04	R1/2	Φ8	Φ13.5	26.5	14	Φ7	16.5	S22
S-PC08-06	R3/4	Φ8	Φ13.5	27.5	15	Φ7	16.5	S27
S-PC10-01	R1/8	Φ10	Φ16	27	8	Φ6	17	S17
S-PC10-02	R1/4	Φ10	Φ16	28	11	Φ7	17	S17
S-PC10-03	R3/8	Φ10	Φ16	25	11	Φ9	17	S17
S-PC10-04	R1/2	Φ10	Φ16	25	14	Φ9	17	S22
S-PC10-06	R3/4	Φ10	Φ16	26.5	15	Φ9	17	S27
S-PC12-01	R1/8	Φ12	Φ18	28	8	Φ6	18	S19
S-PC12-02	R1/4	Φ12	Φ18	31	11	Φ7	18	S19
S-PC12-03	R3/8	Φ12	Φ18	28	11	Φ10	18	S19
S-PC12-04	R1/2	Φ12	Φ18	26	14	Φ10	18	S22
S-PC12-06	R3/4	Φ12	Φ18	27	15	Φ10	18	S27
S-PC14-02	R1/4	Φ14	Φ19.5	29	11	Φ7	19	S22
S-PC14-03	R3/8	Φ14	Φ19.5	29.5	11	Φ10	19	S22
S-PC14-04	R1/2	Φ14	Φ19.5	28.5	14	Φ13	19	S22
S-PC14-06	R3/4	Φ14	Φ19.5	28.5	15	Φ13	19	S27
S-PC16-02	R1/4	Φ16	Φ21.5	29.5	11	Φ7	19	S22
S-PC16-03	R3/8	Φ16	Φ21.5	29.5	11	Φ10	19	S22
S-PC16-04	R1/2	Φ16	Φ21.5	29.5	14	Φ13	19	S22
S-PC16-06	R3/4	Φ16	Φ21.5	29	15	Φ14	19	S27

型号/MODEL	T	ΦD	ΦP	L	A	ΦC	E	H
S-PC04-01G	G1/8	Φ4	Φ9.5	18.5	5.5	Φ3.2	13.5	S12
S-PC04-02G	G1/4	Φ4	Φ9.5	18.5	7	Φ3.2	13.5	S17
S-PC06-01G	G1/8	Φ6	Φ11	19.5	5.5	Φ5.2	15.5	S12
S-PC06-02G	G1/4	Φ6	Φ11	19.5	7	Φ5.2	15.5	S17
S-PC06-03G	G3/8	Φ6	Φ11	19.5	7	Φ5.2	15.5	S19
S-PC06-04G	G1/2	Φ6	Φ11	21.5	9	Φ5.2	15.5	S24
S-PC08-01G	G1/8	Φ8	Φ13.5	23.5	5.5	Φ6	16.5	S14
S-PC08-02G	G1/4	Φ8	Φ13.5	23.5	7	Φ7	16.5	S17
S-PC08-03G	G3/8	Φ8	Φ13.5	21	7	Φ7	16.5	S19
S-PC08-04G	G1/2	Φ8	Φ13.5	23	9	Φ7	16.5	S24
S-PC10-01G	G1/8	Φ10	Φ16	25.5	5.5	Φ6	17	S17
S-PC10-02G	G1/4	Φ10	Φ16	27	7	Φ7	17	S17
S-PC10-03G	G3/8	Φ10	Φ16	23	7	Φ9	17	S19
S-PC10-04G	G1/2	Φ10	Φ16	23	9	Φ9	17	S24
S-PC12-02G	G1/4	Φ12	Φ18	28	7	Φ7	18	S19
S-PC12-03G	G3/8	Φ12	Φ18	23	7	Φ10	18	S22
S-PC12-04G	G1/2	Φ12	Φ18	23	9	Φ10	18	S24
S-PC14-02G	G1/4	Φ14	Φ19.5	26	7	Φ7	19	S22
S-PC14-03G	G3/8	Φ14	Φ19.5	23	7	Φ10	19	S22
S-PC14-04G	G1/2	Φ14	Φ19.5	23	9	Φ12	19	S24
S-PC16-02G	G1/4	Φ16	Φ21.5	26	7	Φ7	19	S22
S-PC16-03G	G3/8	Φ16	Φ21.5	23	7	Φ10	19	S22
S-PC16-04G	G1/2	Φ16	Φ21.5	23	9	Φ13	19	S24

型号/MODEL	T	ΦD	ΦP	L	A	ΦC	E	H
S-PC5/32-10-32	10-32UNF	Φ5/32	Φ9.5	21.5	5	Φ2.5	13.5	S10
S-PC5/32-01N	NPT1/8	Φ5/32	Φ9.5	19	8	Φ3.2	13.5	S10
S-PC5/32-02N	NPT1/4	Φ5/32	Φ9.5	20.5	11	Φ3.2	13.5	S14
S-PC1/4-01N	NPT1/8	Φ1/4	Φ11	22	8	Φ5.2	15.5	S12
S-PC1/4-02N	NPT1/4	Φ1/4	Φ11	23	11	Φ5.2	15.5	S14
S-PC1/4-03N	NPT3/8	Φ1/4	Φ11	23	11	Φ5.2	15.5	S17
S-PC1/4-04N	NPT1/2	Φ1/4	Φ11	26.5	14	Φ5.2	15.5	S22
S-PC5/16-01N	NPT1/8	Φ5/16	Φ13.5	25.5	8	Φ6	16.5	S14
S-PC5/16-02N	NPT1/4	Φ5/16	Φ13.5	24.5	11	Φ7	16.5	S14
S-PC5/16-03N	NPT3/8	Φ5/16	Φ13.5	23.5	11	Φ7	16.5	S17
S-PC5/16-04N	NPT1/2	Φ5/16	Φ13.5	26.5	14	Φ7	16.5	S22
S-PC3/8-01N	NPT1/8	Φ3/8	Φ16	27	8	Φ6	17	S17
S-PC3/8-02N	NPT1/4	Φ3/8	Φ16	27	11	Φ7	17	S17
S-PC3/8-03N	NPT3/8	Φ3/8	Φ16	25	11	Φ9	17	S17
S-PC3/8-04N	NPT1/2	Φ3/8	Φ16	25	14	Φ9	17	S22
S-PC1/2-02N	NPT1/4	Φ1/2	Φ18	31	11	Φ7	18	S19
S-PC1/2-03N	NPT3/8	Φ1/2	Φ18	28	11	Φ10	18	S19
S-PC1/2-04N	NPT1/2	Φ1/2	Φ18	26	14	Φ10	18	S22