


Stainless Steel Solenoid Valve

S2V025 / SS-ASC Series

2 Way Solenoid Valve S2V025 Series



How to Order

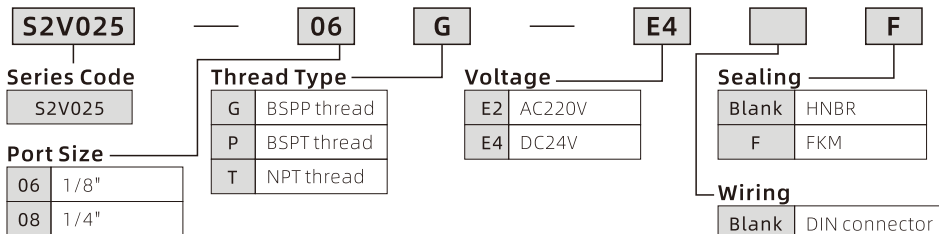


Specifications

MODEL	S2V025-06	S2V025-08
Working Medium	clean Air, water, oil	
Acting Type	Direct acting	
Working Pressure	0-0.8 Mpa	
Working Temperature	-30 ~ 130°C	
Sealing	HNBR	
Lubrication	No need	
Power Consumption	AC: 4.5VA ; DC: 3W	

Stainless Steel Speed Controller SS-ASC series



How to Order

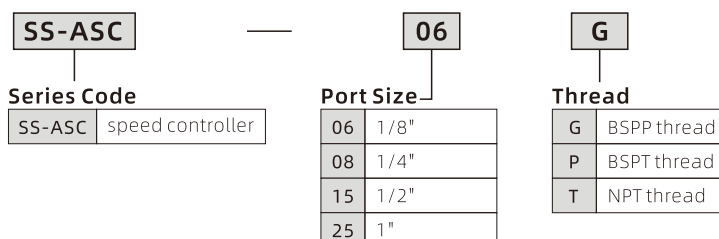


Specifications

Model	SS-ASC-06	SS-ASC-08	SS-ASC-15	SS-ASC-25
Working Medium	40 Micro Filtered Clean Air			
Acting Type	External control			
Working Pressure	0.2-0.8 Mpa			
Working Temperature	-30 ~ 130°C			
Sealing	HNBR			
Lubrication	No need			

Stainless Steel Manifold



How to Order

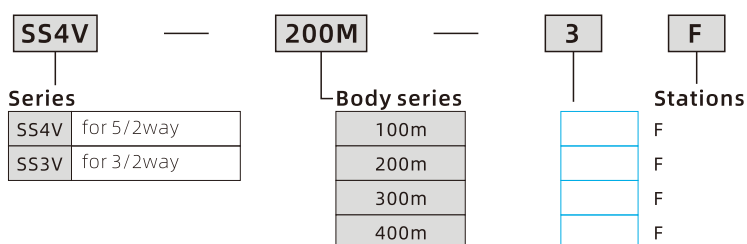

eg., SS4V-100M-5F, stainless Steel manifold for 5/2way valves, 1series valve body, 5 stations