


用途 / APPLICATION

- 用于控制气动装置压缩空气的开与关
- Used for turning air pressure on and off for pneumatic devices.

特点 / FEATURES

- 关闭三通阀时，可以切断压缩空气流入，同时可将气动装置的残留压力排除，以便进行维修和定期检查，能够确保安全
- 两通阀无空气排出功能
- 手控阀门有四种类型供使用
- The three-way valve, when the air is stopped, discharges residual pressure to the outlet, which assures safety in repairing or adjusting connected devices.
- The two-way valve dose not discharge residual pressure.
- There are four types of hand valves for choosing.


结构图 / STRUCTURE CHART

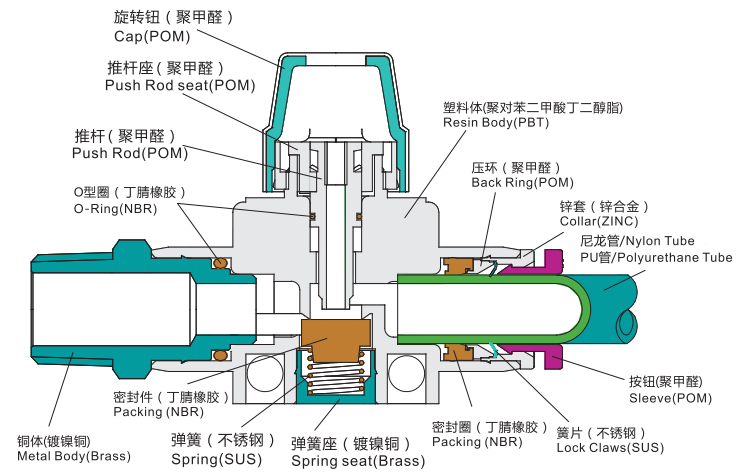

技术参数 / SPECIFICATIONS


使用流体/Fluid	空气 (无其他的气体 and 液体) /Air(no other gases or liquids)
使用压力范围/Operating Pressure	0~1.0MPa(150psi)
负压/Negative Pressure	-100Kpa(-29.5 in-Hg)
使用温度范围/Operating Temperature	0-60℃ (32-140°F)
使用软管/Applicable Tube	PU及尼龙/Polyurethane and Nylon

LHVFF

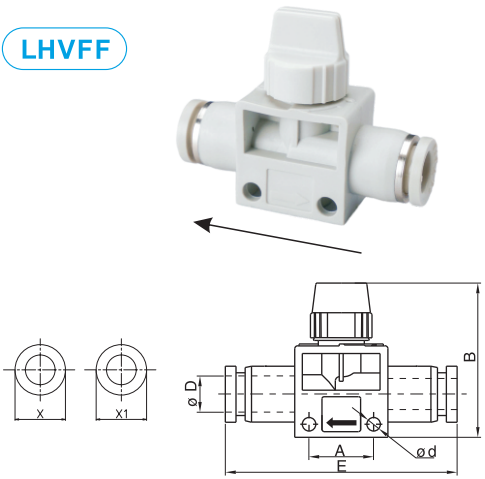


型号/MODEL		ΦD	Φd	A	B	E	X	X1	C1	C2
二通Two-way	三通Three-way									
HVFF04-04B	FHVFF04-04	4	4.2	16.2	40.2	50.3	9.9			
HVFF06-06B	FHVFF06-06	6	4.2	16.2	39.9	51.1	12		17.9	17.9
HVFF08-06B	FHVFF08-06	8	4.2	16.2	39.9	51.6	14	12	18.8	17.9
HVFF08-08B	FHVFF08-08	8	4.2	16.2	39.9	52	14		18.8	18.8
HVFF10-10B	FHVFF10-10	10	4.2	21.2	45	63.3	17		21	21
HVFF12-10B	FHVFF12-10	12	4.2	21.2	45	63.7	20	17	22.6	21
HVFF12-12B	FHVFF12-12	12	4.2	21.2	45	64.1	20		22.6	22.6


LHVFS

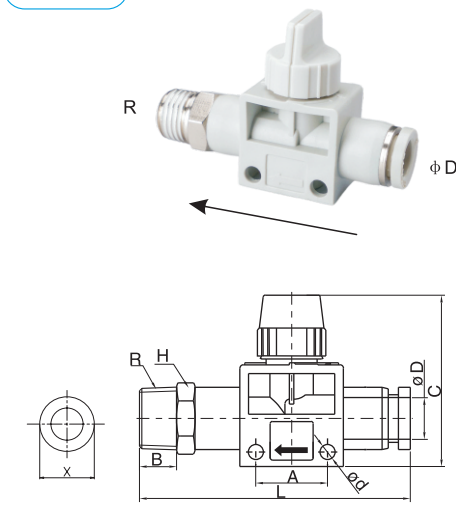

LHVFS-G

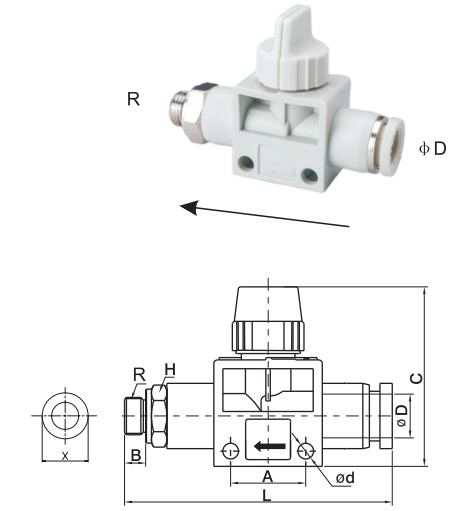

LHVSF

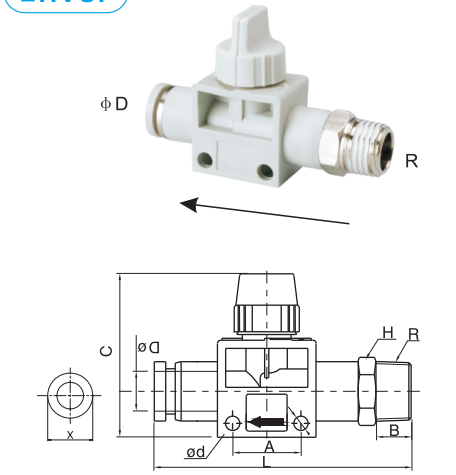

型号/MODEL		L	A	B	C	ΦD	Φd	R	H	X
二通Two-way	三通Three-way									
HVFS06-01B	FHVFS06-01	59.1	16.5	7.5	42.6	6	4.2	R1/8	12	11.9
HVFS06-02B	FHVFS06-02	62.1	16.5	9.5	42.6	6	4.2	R1/4	14	11.9
HVFS06-03B	FHVFS06-03	63.6	16.5	10.5	42.6	6	4.2	R3/8	17	11.9
HVFS08-01B	FHVFS08-01	60	16.5	7.5	42.6	8	4.2	R1/8	14	13.9
HVFS08-02B	FHVFS08-02	62.5	16.5	9.5	42.6	8	4.2	R1/4	14	13.9
HVFS08-03B	FHVFS08-03	64	16.5	10.5	42.6	8	4.2	R3/8	17	13.9
HVFS10-02B	FHVFS10-02	74.4	21.5	9.5	47	10	4.2	R1/4	17	16.9
HVFS10-03B	FHVFS10-03	74.9	21.5	10.5	47	10	4.2	R3/8	17	16.9
HVFS10-04B	FHVFS10-04	78.4	21.5	13.5	47	10	4.2	R1/2	21	16.9
HVFS12-02B	FHVFS12-02	75.3	21.5	9.5	47	12	4.2	R1/4	21	19.9
HVFS12-03B	FHVFS12-03	76.3	21.5	10.5	47	12	4.2	R3/8	21	19.9
HVFS12-04B	FHVFS12-04	78.8	21.5	13.5	47	12	4.2	R1/2	21	19.9

型号/MODEL		L	A	B	C	ΦD	Φd	R	H	X
二通Two-way	三通Three-way									
HVFS06-G01B	FHVFS06-G01	58.1	16.5	5.5	42.6	6	4.2	G1/8	14	11.9
HVFS06-G02B	FHVFS06-G02	59.6	16.5	6.5	42.6	6	4.2	G1/4	14	11.9
HVFS06-G03B	FHVFS06-G03	61.1	16.5	7.5	42.6	6	4.2	G3/8	14	11.9
HVFS08-G01B	FHVFS08-G01	58.5	16.5	5.5	42.6	8	4.2	G1/8	14	13.9
HVFS08-G02B	FHVFS08-G02	60	16.5	6.5	42.6	8	4.2	G1/4	17	13.9
HVFS08-G03B	FHVFS08-G03	61.5	16.5	7.5	42.6	8	4.2	G3/8	17	13.9
HVFS10-G02B	FHVFS10-G02	70.9	21.5	6.5	47	10	4.2	G1/4	17	16.9
HVFS10-G03B	FHVFS10-G03	72.4	21.5	7.5	47	10	4.2	G3/8	20	16.9
HVFS10-G04B	FHVFS10-G04	75.9	21.5	10	47	10	4.2	G1/2	19	16.9
HVFS12-G02B	FHVFS12-G02	70.9	21.5	6.5	47	12	4.2	G1/4	21	19.9
HVFS12-G03B	FHVFS12-G03	71.9	21.5	7.5	47	12	4.2	G3/8	21	19.9
HVFS12-G04B	FHVFS12-G04	75.4	21.5	10	47	12	4.2	G1/2	24	19.9

型号/MODEL		L	A	B	C	ΦD	Φd	R	H	X
二通Two-way	三通Three-way									
HVFSF01-06B	FHVFSF01-06	59.1	16.5	7.5	42.6	6	4.2	R1/8	12	11.9
HVFSF02-06B	FHVFSF02-06	62.1	16.5	9.5	42.6	6	4.2	R1/4	14	11.9
HVFSF03-06B	FHVFSF03-06	63.6	16.5	10.5	42.6	6	4.2	R3/8	17	11.9
HVFSF01-08B	FHVFSF01-08	60	16.5	7.5	42.6	8	4.2	R1/8	14	13.9
HVFSF02-08B	FHVFSF02-08	62.5	16.5	9.5	42.6	8	4.2	R1/4	14	13.9
HVFSF03-08B	FHVFSF03-08	64	16.5	10.5	42.6	8	4.2	R3/8	17	13.9
HVFSF02-10B	FHVFSF02-10	74.4	21.5	9.5	47	10	4.2	R1/4	17	16.9
HVFSF03-10B	FHVFSF03-10	74.9	21.5	10.5	47	10	4.2	R3/8	17	16.9
HVFSF04-10B	FHVFSF04-10	78.4	21.5	13.5	47	10	4.2	R1/2	21	16.9
HVFSF02-12B	FHVFSF02-12	75.3	21.5	9.5	47	12	4.2	R1/4	21	19.9
HVFSF03-12B	FHVFSF03-12	76.3	21.5	10.5	47	12	4.2	R3/8	21	19.9
HVFSF04-12B	FHVFSF04-12	78.8	21.5	13.5	47	12	4.2	R1/2	21	19.9