

特点

- 快插式气管接头用于气动管类系统
- 管接头具有各种各样的型号，可以满足你在气动管类系统中的所有需要
- 即使安装之后，管道的方向仍然可以自由改变
- 镀镍的铜体可以防腐蚀和污染
- 所有的R跟NPT 螺纹胶都起密封作用
- 所有的直螺纹都用标准的O型圈


FEATURES

- One-Touch tube fittings are used in pneumatics piping.
- The tube fittings come in a wide variety of models to meet all your needs in pneumatics piping.
- Even after installation,the direction of the tube can be changed freely.
- Nickel-Plated metal body ensures Anti-Corrosion and Anti-Contarmination.
- All R and NPT threads are Pre-Coated sealant.
- All cylindrical threads are standard with O-Ring seals.

技术参数 / SPECIFICATIONS

使用流体/Fluid	空气,真空/Air,Vacuum
使用压力范围/Operating Pressure	0~1.0MPa(150psi)
负压/Negative Pressure	-100Kpa(-29.5 in-Hg)
耐压/Max Pressure	1.5MPa
使用环境及流体温度/Operating Temperature	0-60°C (32-140°F)
适用软管/Applicable Tube	PU及尼龙管/Polyurethane and Nylon

结构图 / STRUCTURE CHART

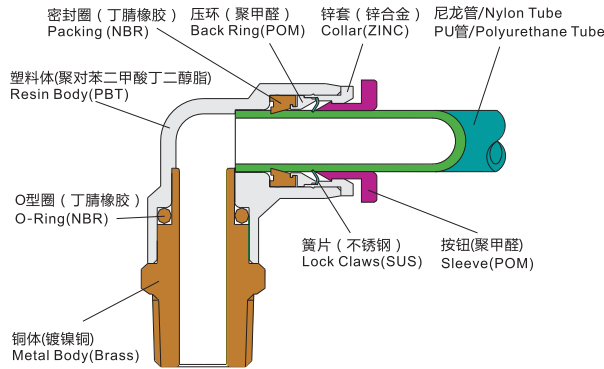

订购码 / ORDER CODE



(1) 系列号/ Series : F为灰色系列, B为黑色系列, A为白色系列
F:Grey series, B:Black series, A:White series.

(2) 型号/Model

(3) 气管直径/Tube O.D.

公制管/Metric Size							
代号/Code	4	6	8	10	12	14	16
气管外径/ Tube Outer Diameter mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ14	Φ16

英制管/Inch Size						
代号/Code	5/32	3/16	1/4	5/16	3/8	1/2
气管外径/ Tube Outer Diameter mm	Φ5/32	Φ3/16	Φ1/4	Φ5/16	Φ3/8	Φ1/2

(4) 螺纹大小/Thread Size

(5) 螺纹标准/Thread Type: 空白代表PT螺纹, G代表G螺纹, N代表NPT螺纹
Blank: PT Thread, G: G Thread, N: NPT Thread


公制/Metric Size									
代号/Code	M5	M6	M8	M10	M12	M12A	M14	M16	M20
螺纹/Thread	M5*0.8	M6*1	M8*1	M10*1	M12*1.25	M12*1.5	M14*1.5	M16*1.5	M20*1.5

55°锥管螺纹/55° Taper Pipe Size					
代号/Code	01	02	03	04	06
螺纹/Thread	R1/8	R1/4	R3/8	R1/2	R3/4


55°直管螺纹/55°Taper Pipe Size					
代号/Code	01G	02G	03G	04G	06G
螺纹/Thread	G1/8	G1/4	G3/8	G1/2	G3/4

统一细牙螺纹/UNF 美制60°锥管螺纹/American Standard Taper Pipe Thread(NPT)						
代号/Code	U10	01N	02N	03N	04N	06N
螺纹/Thread	10-32UNF	NPT1/8	NPT1/4	NPT3/8	NPT1/2	NPT3/4


LPC

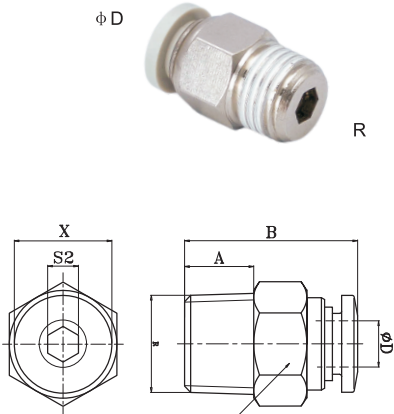

LPC-G

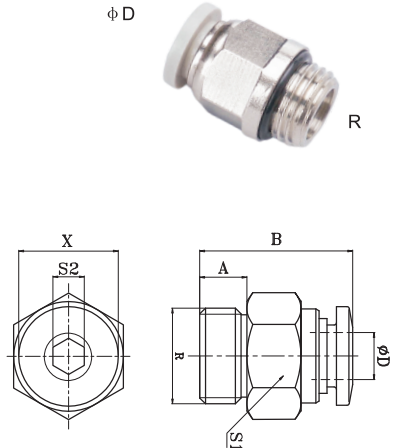

LPC-N

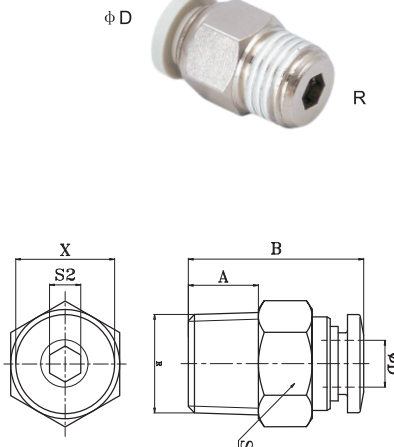

型号/MODEL	D	R	A	B	S1	S2	X
PC04-M5	4	M5	4	21.6	10	2	9.9
PC04-M6	4	M6	4.5	22.1	10	2	9.9
PC04-01	4	R1/8	7.5	19.8	10	3	9.9
PC04-02	4	R1/4	9.5	18.1	14	3	9.9
PC06-M5	6	M5	4	22.3	12	2	11.9
PC06-M6	6	M6	4.5	23	12	2	11.9
PC06-01	6	R1/8	7.5	20.8	12	3	11.9
PC06-02	6	R1/4	9.5	21.9	14	4	11.9
PC06-03	6	R3/8	10.5	20.9	17	4	11.9
PC06-04	6	R1/2	13.5	23.9	21	4	11.9
PC08-01	8	R1/8	7.5	26.9	14	5	13.9
PC08-02	8	R1/4	9.5	24.4	14	5	13.9
PC08-03	8	R3/8	10.5	22.4	17	6	13.9
PC08-04	8	R1/2	13.5	24.9	21	6	13.9
PC10-01	10	R1/8	7.5	29.4	17	5	16.9
PC10-02	10	R1/4	9.5	30.7	17	6	16.9
PC10-03	10	R3/8	10.5	27.9	17	8	16.9
PC10-04	10	R1/2	13.5	22.4	21	8	16.9
PC12-01	12	R1/8	7.5	32.1	20	5	19.9
PC12-02	12	R1/4	9.5	34	20	6	19.9
PC12-03	12	R3/8	10.5	30.2	20	8	19.9
PC12-04	12	R1/2	13.5	29.1	21	8	19.9
PC14-02	14	R1/4	7.5	34	22	8	21.8
PC14-03	14	R3/8	10.5	35	22	8	21.8
PC14-04	14	R1/2	13.5	33	22	10	21.8
PC16-03	16	R3/8	10.5	36.5	24	8	23.9
PC16-04	16	R1/2	13.5	34.6	24	10	23.9
PC16-06	16	R3/4	15	29.5	27	10	23.9

型号/MODEL	D	R	A	B	S1	S2	X
PC04-01G	4	G1/8	5.5	18.9	10	3	9.9
PC04-02G	4	G1/4	6.5	18.4	10	3	9.9
PC06-01G	6	G1/8	5.5	20.5	12	4	11.9
PC06-02G	6	G1/4	6.5	21	12	4	11.9
PC06-03G	6	G3/8	7.5	20.5	12	4	11.9
PC06-04G	6	G1/2	10	22.9	12	4	11.9
PC08-01G	8	G1/8	5.5	26	14	5	13.9
PC08-02G	8	G1/4	6.5	23.6	14	5	13.9
PC08-03G	8	G3/8	7.5	23	14	6	13.9
PC08-04G	8	G1/2	10	24	14	6	13.9
PC10-01G	10	G1/8	5.5	27.9	17	5	16.9
PC10-02G	10	G1/4	6.5	29.4	17	6	16.9
PC10-03G	10	G3/8	7.5	25.9	17	8	16.9
PC10-04G	10	G1/2	10	25.9	17	8	16.9
PC12-01G	12	G1/8	5.5	30.6	20	5	19.9
PC12-02G	12	G1/4	6.5	32.2	20	6	19.9
PC12-03G	12	G3/8	7.5	30	20	8	19.9
PC12-04G	12	G1/2	10	31	20	8	19.9
PC14-02G	14	G1/2	6.5	32	22	8	21.8
PC14-03G	14	G3/8	7.5	32.5	22	8	21.8
PC14-04G	14	G1/2	10	31	24	10	21.8
PC16-03G	16	G3/8	7.5	34	24	8	23.9
PC16-04G	16	G1/2	10	37	24	10	23.9

型号/MODEL	D(英寸)	R	A	B	S1(英寸)	S2(英寸)	X
PC5/32-01N	5/32	NPT1/8	7.5	20.3	7/16	3/32	9.9
PC5/32-02N	5/32	NPT1/4	9.5	19	9/16	3/32	9.9
PC1/4-01N	1/4	NPT1/8	7.5	20.8	1/2	5/32	11.9
PC1/4-02N	1/4	NPT1/4	9.5	23.8	9/16	5/32	11.9
PC1/4-03N	1/4	NPT3/8	10.5	24.2	11/16	5/32	11.9
PC1/4-04N	1/4	NPT1/2	13.5	26.6	7/8	5/32	11.9
PC5/16-01N	5/16	NPT1/8	7.5	26.5	9/16	3/16	13.9
PC5/16-02N	5/16	NPT1/4	9.5	24.7	9/16	7/32	13.9
PC5/16-03N	5/16	NPT3/8	10.5	22	11/16	7/32	13.9
PC5/16-04N	5/16	NPT1/2	13.5	25.3	7/8	7/32	13.9
PC3/8-01N	3/8	NPT1/8	7.5	30	11/16	3/16	16.9
PC3/8-02N	3/8	NPT1/4	9.5	31.3	11/16	7/32	16.9
PC3/8-03N	3/8	NPT3/8	10.5	28.5	11/16	5/16	16.9
PC3/8-04N	3/8	NPT1/2	13.5	25.9	7/8	5/16	16.9
PC1/2-01N	1/2	NPT1/8	7.5	32.1	7/8	3/16	19.9
PC1/2-02N	1/2	NPT1/4	9.5	34	7/8	1/4	19.9
PC1/2-03N	1/2	NPT3/8	10.5	30.2	7/8	5/16	19.9
PC1/2-04N	1/2	NPT1/2	13.5	32.2	7/8	5/16	19.9